

R32  
R410A

# PCA-HA SERIES

PCA-M71HA2

Standard features include a strong carbon-black stainless steel body and built-in oil mist filter to prevent oil from getting into the unit providing a comfortable air conditioning environment in kitchens that use open-flame cooking.



## Tough on Oily Smoke

A durable stainless steel casing that is resistant to oil and grease is provided to protect the surface of the body. Grimy dirt and stains are removed easily, enabling the unit to be kept clean at all times.

## High-performance Oil Mist Filter


A high-performance heavy-duty oil mist filter is included as standard equipment. The filtering system is more efficient than conventional filters, thereby effectively reducing the oily smoke entering the air conditioner. The filter is disposable, thereby enabling trouble-free cleaning and maintenance.

### Oil Mist Filter Cleaning

When used in kitchens, the oil mist filter should be replaced once every two months. The system comes with 12 filters elements. After these have been used, optional elements (PAC-SG38KF-E) can be purchased.



Oil mist filter



Pull the handle to easily slide the filter out


## Easy Maintenance – Even for Cleaning the Fan

A separate fan casing that can be disassembled in sections is adopted to ensure easy fan cleaning. Drain pan cleaning onsite is also no problem owing to the use of a pipe connector that is easily removed.




## Cosmetic Front and Hanging Fixture Covers (Option)

Cosmetic covers are available to prevent the collection of dust and grime on the main body and hanging fixture sections.

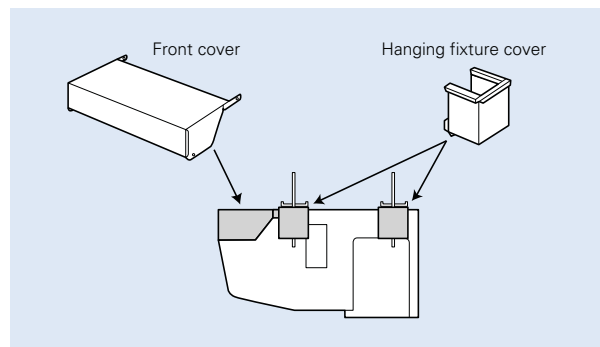

## Fresh Outside-air Intake (Option)

There is a knock-out opening on the rear panel of the unit that can be used to bring fresh air into the unit. This helps to improve ventilation and make the kitchen comfortable.

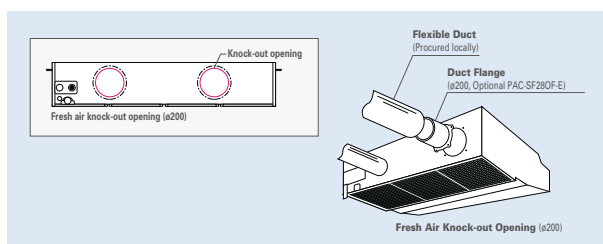

- Notes: 1) A fresh-air duct flange is required (sold separately)  
2) Intake air is not 100% fresh (outside) air.

## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit

**R32**  
**R410A**



PCA-M71HA2

#### Outdoor Unit

**R32**

For Single



PUZ-ZM71

**R32**

For Multi  
(Twin/Triple)



PUZ-ZM140/250

#### Remote Controller



Optional



Optional



Optional



Optional

**PCA-M HA Indoor Unit Combinations** Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		—	—	—	71x1	—	—	—	—	—	—	—	71x2	—	—	—	—	71x3	—	—	
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E	—	—	—	—	MSDT-111R3-E	—	—	

## SERIES SELECTION

### Power Inverter Series



#### Indoor Unit

**R32**  
**R410A**



PCA-M71HA2

#### Outdoor Unit

**R410A**

For Single



PUHZ-ZRP71

**R410A**

For Multi  
(Twin/Triple)



PUHZ-ZRP140/250

#### Remote Controller



Optional



Optional



Optional




Optional

**PCA-M HA Indoor Unit Combinations** Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		—	—	—	71x1	—	—	—	—	—	—	—	—	71x2	—	—	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E	—	—	—	—	MSDT-111R-E	—	—

# PCA-RP HA SERIES

## POWER INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PCA-M71HA2	
Outdoor Unit				PUZ-ZM71VHA2	
Refrigerant <sup>(*)</sup>				R32	
Power Supply				Outdoor power supply	
Cooling	Outdoor(V/Phase/Hz)			230/Single/50	
	Capacity	Rated	kW	7.1	
		Min-Max	kW	3.3 - 8.1	
	Total Input	Rated	kW	2.028	
	EER			3.50	
	Design load		kW	7.1	
	Annual electricity consumption <sup>(2)</sup>			443	
	SEER <sup>(4)</sup>			5.6	
	Energy efficiency class			A+	
Heating	Capacity	Rated	kW	7.6	
		Min-Max	kW	3.5 - 10.2	
	Total Input	Rated	kW	2.171	
	COP			3.50	
	Design load		kW	4.7	
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	
		at bivalent temperature	kW	4.7 (-10°C)	
		at operation limit temperature	kW	3.4 (-20°C)	
	Back up heating capacity		kW	0.0	
	Annual electricity consumption <sup>(2)</sup>			1684	
SCOP <sup>(4)</sup>			3.9		
Energy efficiency class			A		
Operating Current(Max)				A	
				19.4	
Indoor Unit	Input [cooling / Heating ]	Rated	kW	0.10 / 0.10	
	Operating Current(Max)			A	
	Dimensions			H*W*D	
				mm	
	Weight			kg	
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	
	Sound Level (PWL)			dB(A)	
Outdoor Unit	Dimensions	H*W*D	mm	943-950-330(+25)	
	Weight		kg	67	
	Air Volume	Cooling	m³/min	55	
		Heating	m³/min	55	
	Sound Level (SPL)	Cooling	dB(A)	47	
		Heating	dB(A)	49	
	Sound Level (PWL)	Cooling	dB(A)	67	
		Operating Current(Max)			A
	Breaker Size			A	
				25	
Ext.Piping	Diameter <sup>(5)</sup>	Liquid/Gas	mm	9.52 / 15.88	
	Max.Length	Out-In	m	55	
	Max.Height	Out-In	m	30	
Guaranteed Operating Range (Outdoor)		Cooling <sup>(3)</sup>	°C	-15 ~ +46	
		Heating	°C	-20 ~ +21	

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.


\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

\*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. \*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

# PCA-RP HA SERIES

## POWER INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PCA-M71HA2	
Outdoor Unit				PUHZ-ZRP71VHA2	
Refrigerant <sup>(*)</sup>				R410A	
Power Supply	Source			Outdoor power supply	
Cooling	Outdoor(V/Phase/Hz)			230/Single/50	
	Capacity	Rated	kW	7.1	
		Min-Max	kW	3.3 - 8.1	
	Total Input	Rated	kW	2.170	
	EER			3.27	
	Design load		kW	7.1	
	Annual electricity consumption <sup>(2)</sup>		kWh/a	444	
	SEER <sup>(4)</sup>			5.6	
		Energy efficiency class			A+
Heating	Capacity	Rated	kW	7.6	
		Min-Max	kW	3.5 - 10.2	
	Total Input	Rated	kW	2.350	
	COP			3.23	
	Design load		kW	4.7	
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	
		at bivalent temperature	kW	4.7 (-10°C)	
		at operation limit temperature	kW	3.5 (-20°C)	
	Back up heating capacity		kW	0.0	
	Annual electricity consumption <sup>(2)</sup>		kWh/a	1724	
	SCOP <sup>(4)</sup>			3.8	
		Energy efficiency class			A
Operating Current(Max)			A	19.4	
Indoor Unit	Input [cooling / Heating ]	Rated	kW	0.10 / 0.10	
	Operating Current(Max)		A	0.43	
	Dimensions	H*W*D	mm	280-1136-650	
	Weight		kg	42	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	16-18	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	37-39	
	Sound Level (PWL)		dB(A)	57	
	Dimensions	H*W*D	mm	943-950-330(+30)	
Outdoor Unit	Weight		kg	70	
	Air Volume	Cooling	m³/min	55	
		Heating	m³/min	55	
	Sound Level (SPL)	Cooling	dB(A)	47	
		Heating	dB(A)	48	
	Sound Level (PWL)	Cooling	dB(A)	67	
	Operating Current(Max)		A	19	
	Breaker Size		A	25	
	Ext.Piping	Diameter <sup>(3)</sup>	Liquid/Gas	mm	9.52 / 15.88
Max.Length		Out-In	m	50	
Max.Height		Out-In	m	30	
Guaranteed Operating Range (Outdoor)			Cooling <sup>(23)</sup>	°C	-15 ~ +46
			Heating	°C	-20 ~ +21

\*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

\*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

\*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

\*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. \*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.