






























SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units.
Easily construct a system that best matches room air conditioning needs.

R32 INDOOR UNIT		R32 OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA  Wall-mounted PKA-M LA(L) PKA-M KA(L)  Ceiling-concealed PEA-M  Floor-standing PSA-M		Power Inverter  PUZ-ZM35/50  PUZ-ZM60/71  PUZ-ZM100/125/140/ 200/250	Standard Inverter  SUZ-M35  SUZ-M50  SUZ-M60/71  PUZ-M100/125/140  PUZ-M200/250

* Some indoor units cannot be used with this unit.



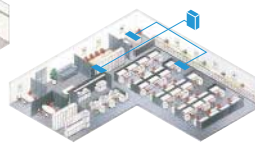
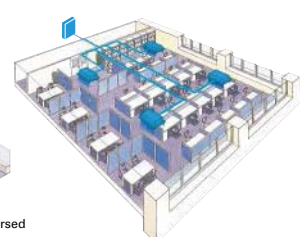
R410A INDOOR UNIT		R410A OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA  Wall-mounted PKA-M LA(L) PKA-M KA(L)  Floor-standing PSA-M  Ceiling-concealed PEA-M		Power Inverter  PUHZ-ZRP35/50  PUHZ-ZRP60/71  PUHZ-ZRP100/125/140/ 200/250	Standard Inverter  SUZ-KA35  SUZ-KA50/60/71  PUHZ-P100/125/140  PUHZ-P200/250

To confirm compatibility with the MXZ Series, refer to the MXZ Series page.

* Some indoor units cannot be used with this unit.

SELECT COMBINATION

Choose the installation pattern for the indoor units. (In the case of a multi-system, distribution piping is necessary, so please select the necessary piping as well.)
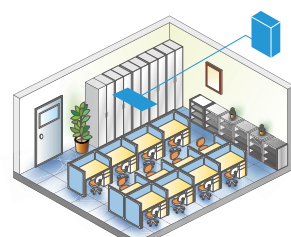
<h3>Single System</h3> 	<h3>Simultaneous Multi-System</h3> <div><div><h4>Twin</h4><p>Allows simultaneous operation of two indoor units on one floor.</p></div><div><h4>Triple</h4><p>Can cover a large-scale space or dispersed installation on the same floor.</p></div></div>	<div><h3>Quadruple</h3><p>Realises the optimum temperature distribution even in a large space.</p></div>
--	--	---


Connectable Combinations for Inverter Units

Outdoor Unit Capacity	Indoor Unit Capacity		
	Twin 50 : 50	Triple 33 : 33 : 33	Quadruple 25 : 25 : 25 : 25
71	35 × 2	—	—
100	50 × 2	—	—
125	60 × 2	—	—
140	71 × 2	50 × 3	—
200	100 × 2	60 × 3	50 × 4
250	125 × 2	71 × 3	60 × 4
Distribution Pipe	MSDD-50TR-E MSDD-50WR-E MSDD-50TR2-E2 MSDD-50WR2-E	MSDT-111R-E MSDT-111R3-E	MSDF-1111R-E MSDF-1111R2-E

Note: The distribution pipe listed is required for simultaneous multi-systems.

Power Inverter SERIES

Our Eco-conscious Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency through use of New R32 refrigerant and advanced technologies.

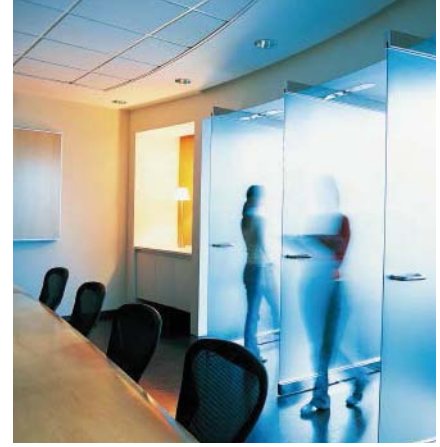

R32



PUZ-ZM35/50VKA2

R32



PUZ-ZM60/71VHA2


R32



PUZ-ZM100/125/140V(Y)KA2
PUZ-ZM200/250YKA2

Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.

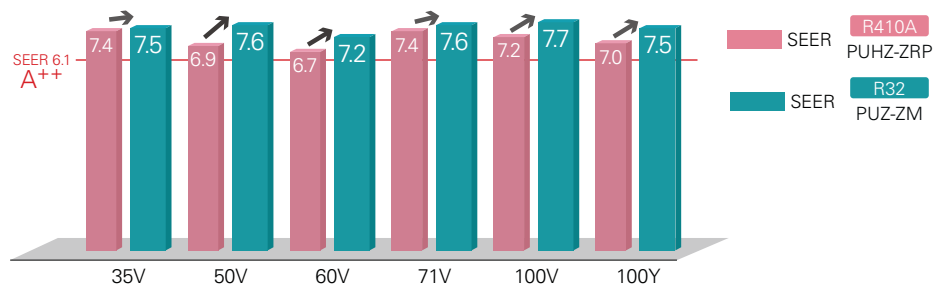


Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

Longer piping (60/71/100/125/140/200/250)


Longer piping length realised for 60, 71, 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Piping Length	
	R410A PUHZ-ZRP	R32 PUZ-ZM
35/50	50m	50m
60/71	50m	55m
100/125/140	75m	100m
200/250	100m	100m

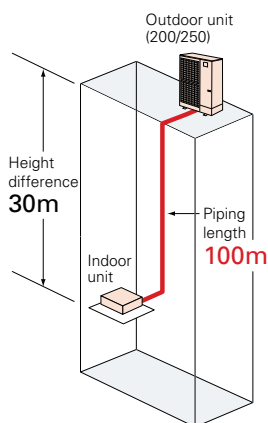

Rated heating capacity maintained down to -3°C*

Rated heating capacity maintained even when the outside temperature is down to -3°C. Stay warm even at times of cold weather.

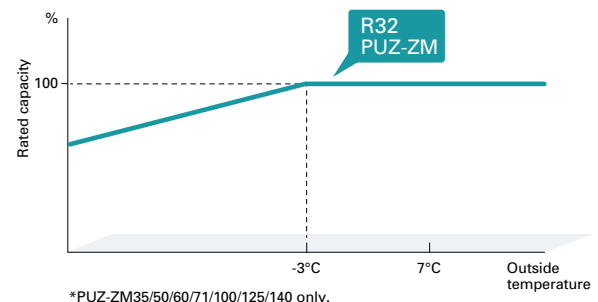


2+1 Back-up rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.

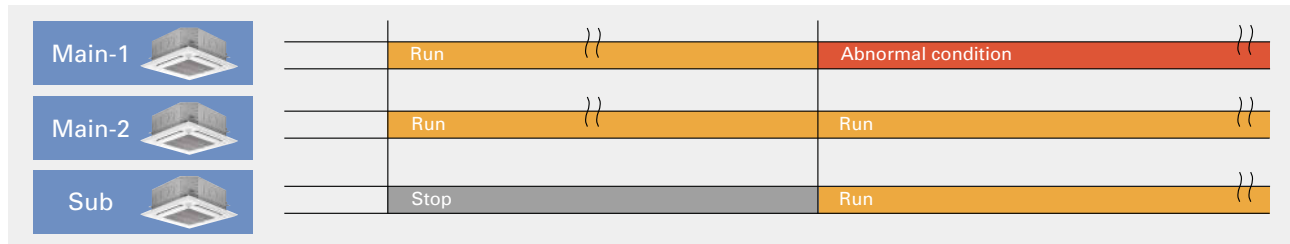


Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.

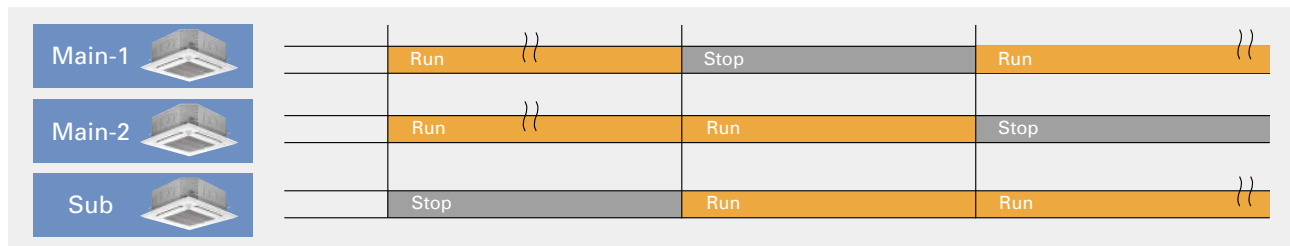

Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

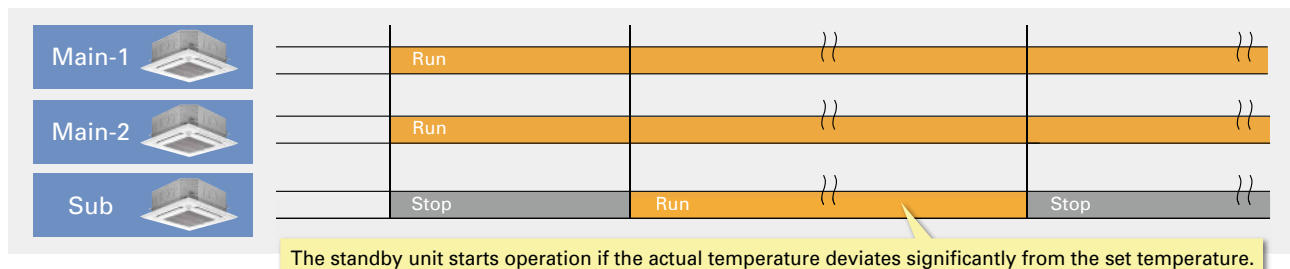


Extended cooling set temperature range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19–30°C. to 14–30°C.

*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

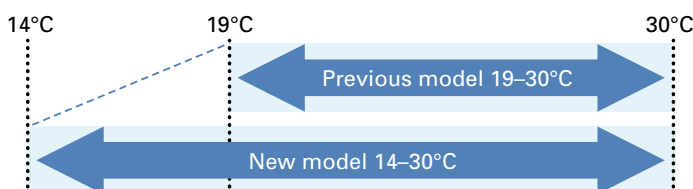

Display of model names and serial numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Model name display (example)

Collect model names and S/N	
OU	PUZ-ZM200YKA2
IU1	PLA-ZM50EA2
IU2	PLA-ZM50EA2
IU3	PLA-ZM50EA2
IU4	PLA-ZM50EA2
Collect data: ✓	
—Address +	S/N

●Serial number display (example)

Collect model names and S/N	
OU	1ZU00001
IU1	1ZA00001
IU2	1ZA00002
IU3	1ZA00003
IU4	1ZA00004
Collect data: ✓	
—Address +	Model

Preliminary error history*

In addition to error history, the history of preliminary abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Error history (Sample)

Error history 1/4			
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0	0-1	20/12/20	AM 1:23
E0	0-1	20/11/20	PM10:55
E0	0-1	20/10/20	PM12:01
Error history menu:			
▼ Page ▲		Delete	

●Preliminary error history (Sample)

Preliminary error hist. 1/8			
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0	0-1	20/12/20	AM 1:23
E0	0-1	20/11/20	PM10:55
E0	0-1	20/10/20	PM12:01
Error history menu:			
▼ Page ▲		Delete	

Display of power consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

< Data Collection Period >

Time data: Every 30 minutes over the past month

Monthly/daily data: Monthly over the past 14 months

Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

●Every 30 minutes (example)

Energy data			
2019- 1- 1	1234.5kWh	1/6	
0:30 123.4kWh	2:30 123.4kWh		
1:00 123.4kWh	3:00 123.4kWh		
1:30 123.4kWh	3:30 123.4kWh		
2:00 123.4kWh	4:00 123.4kWh		
Return:			
- Date +		▼ Page ▲	

●Daily (example)

Energy data			
2019- 1	123456.7kWh	1/4	
31 1234.5kWh	27 1234.5kWh		
30 1234.5kWh	26 1234.5kWh		
29 1234.5kWh	25 1234.5kWh		
28 1234.5kWh	24 1234.5kWh		
Return:			
▼ Page ▲			

●Monthly (example)

Energy data			
▶2019- 1	123456.7kWh	1/3	
2018-12	123456.7kWh		
2018-11	123456.7kWh		
2018-10	123456.7kWh		
2018- 9	123456.7kWh		
View daily data: <input checked="" type="checkbox"/>			
▼ Cursor ▲			

Improved defrosting performance*


*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Avoiding Simultaneous Defrosting

When each of multiple units is in operation for heating in the same space, these may start defrosting at the same time, resulting in a drop in the room temperature. Therefore, we have developed a new function that controls up to four-refrigerant air conditioning system to avoid simultaneous defrosting. By ensuring that defrosting is only performed by one unit at a time, it is possible to minimize any decrease in room temperature.

Example System Configuration

Four sets controlled by a single remote controller

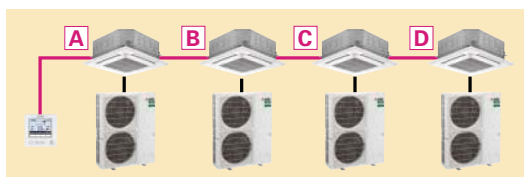


■When All Sets Are Controlled Together



Defrosting When People Are Absent


The use of the 3D i-see sensor allows a more comfortable defrosting schedule. After a large amount of frost has built up, the system will switch to defrosting when the 3D i-see sensor detects that no people are present. By minimizing defrosting while people are in the room, there is a much lower chance of a temperature drop while the room is occupied.

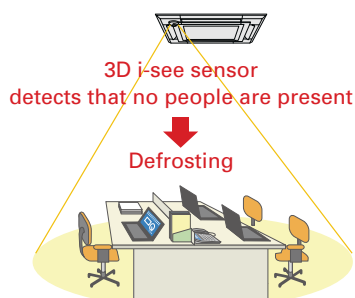

* Only compatible with 4-way cassette and 2x2 cassette models with an attached 3D i-see sensor panel. Even though people are present in the room, the defrosting process may start if all defrosting conditions are met.

Defrosting When Operation is Stopped

It takes a long time to start operation if there is an excess build-up of frost. Therefore, each unit is equipped with a control system where defrosting is performed immediately after operation is stopped when there is a large amount of frost. This allows heating to be quickly started the next day.

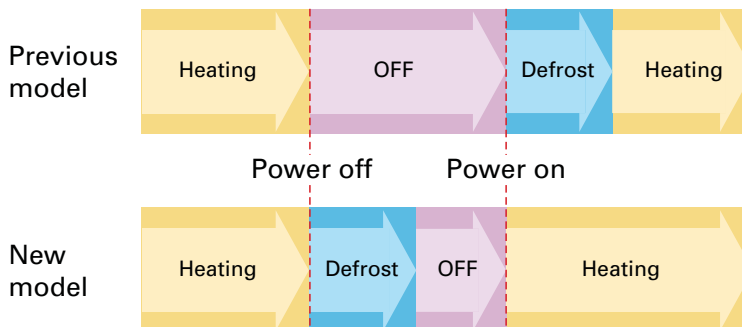

PKA SERIES

The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (M35-M100 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Series is the answer to your air conditioning needs.

R32
R410A

PKA-M35/50LA(L)2

PKA-M60/71/100KA(L)2

R32
R410A





New Design (M35-50)

A sharp and simple form that combines beauty and function. The simple square design harmonizes beautifully with the straight lines created by the intersection of the walls, floor and ceiling of the space, leading to a better quality of space. Also adopted a new white body color. It will make your life and space beautiful and comfortable without disturbing the atmosphere of the room. In addition, we realized miniaturization of conventional model. It contributes to space saving of installation area and giving room to room space.



Quietness (M35-50)

The noise level has been significantly reduced compared to the conventional model by reviewing the unit structure and improving the line flow fan.

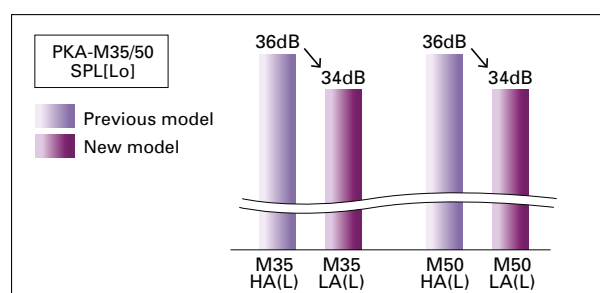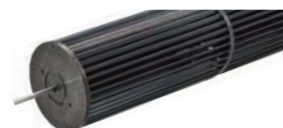

New Wireless Remote Controller Included

The PKA-KAL2 series wireless remote controller has been updated. It now comes with a new stylish remote controller that fits comfortably in your hand and has a wide range of useful functions.




Main Functions of new Wireless Remote Controller

- Weekly Timer
- Backlight
- Dual set point
- Battery replacement sign etc...

ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

Highly efficient indoor unit heat exchangers and newly designed power inverters (PUHZ-ZM) contribute to an amazing reduction in electricity consumption throughout a year, and have resulted in models in the full-capacity range attaining the rank A, A+ and A++ energy savings rating.

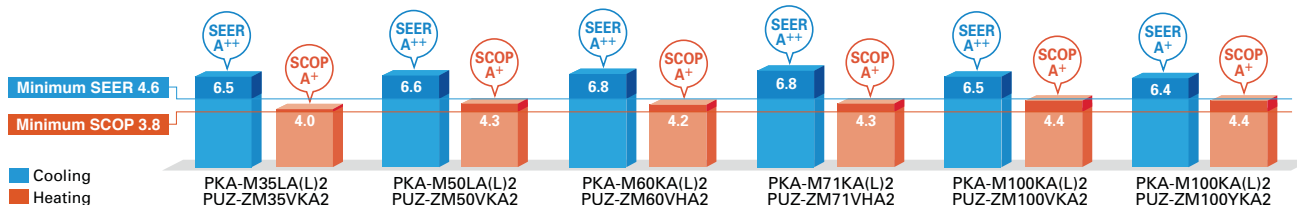


Airflow Control – Horizontal Airflow – (M35-50)

Significantly improved airflow control to achieve horizontal airflow. This reduces the feeling of draft even on a wall-mounted model, and air conditioning the indoor space firmly.

Airflow distributions

PKA-M50LA <Cooling mode> Horizontal airflow

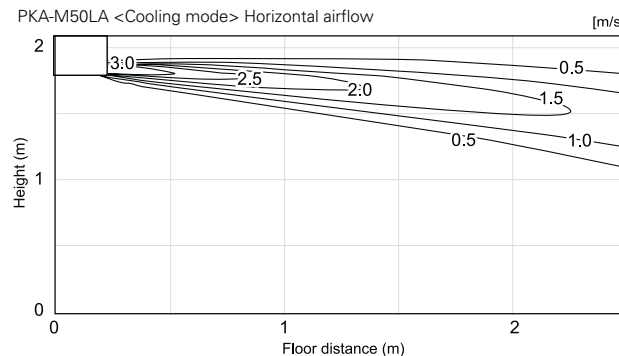

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2

R32
R410A



PKA-M60/71/100KA(L)2

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M: LAL2 only

(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA(L)2/KA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	71x1	100x1	—	—	—	—	35x2	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E				MSDD-50WR2-E	—	MSDT-111R3-E			MSDF-1111R2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2



PKA-M60/71/100KA(L)2

Outdoor Unit

R32

For Single



PUZ-M100

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M: LAL2 only


(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA(L)2/KA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M)		—	—	—	—	100x1	—	—	—	—	—	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-F	—	MSDT-111R3-E			MSDF-1111B2-E	

PKA-M SERIES

POWER INVERTER

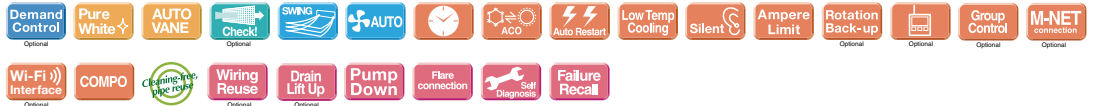

Type				Inverter Heat Pump					
Indoor Unit				PKA-M35LA(L)2	PKA-M50LA(L)2	PKA-M60KA(L)2	PKA-M71KA(L)2	PKA-M100KA(L)2	PKA-M100KA(L)2
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100YKA2
Refrigerant ⁽¹⁾				R32					
Power Source				Outdoor power supply					
Supply Outdoor(V/Phase/Hz)				VKA-VHA:230/Single/50, YKA:400/Three/50					
Cooling	Capacity	Rated	kW	3.6	4.6	6.1	7.1	9.5	9.5
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4
	Total Input	Rated	kW	0.857	1.239	1.560	1.863	2.435	2.435
	EER			4.20	3.71	3.91	3.81	3.90	3.90
	Design load		kW	3.6	4.6	6.1	7.1	9.5	9.5
	Annual electricity consumption ⁽²⁾		kWh/a	194	244	314	365	508	519
	SEER ⁽⁴⁾			6.5	6.6	6.8	6.8	6.5	6.4
	Energy efficiency class			A++	A++	A++	A++	A++	A++
	Capacity	Rated	kW	4.1	5.0	7.0	8.0	11.2	11.2
		Min-Max	kW	1.6 - 5.2	2.5 - 7.0	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0
Heating	Total Input	Rated	kW	1.040	1.344	1.732	2.116	3.102	3.102
	COP			3.94	3.72	4.04	3.78	3.61	3.61
	Design load		kW	2.4	3.3	4.4	4.7	7.8	7.8
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)	3.2 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0
	Annual electricity consumption ⁽²⁾		kWh/a	829	1074	1464	1530	2477	2478
	SCOP ⁽⁴⁾			4.0	4.3	4.2	4.3	4.4	4.4
	Energy efficiency class			A+	A+	A+	A+	A+	A+
Operating Current(Max)		A	13.4	13.4	19.4	19.4	20.6	8.6	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.04 / 0.03	0.04 / 0.03	0.06 / 0.05	0.06 / 0.05	0.08 / 0.07	0.08 / 0.07
	Operating Current(Max)		A	0.35	0.35	0.43	0.43	0.57	0.57
	Dimensions	H*W*D	mm	299-898-237	299-898-237	365-1170-295	365-1170-295	365-1170-295	365-1170-295
	Weight		kg	12.6	12.6	21	21	21	21
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	7.5-8.2-9.2-10.9	7.5-8.2-9.2-10.9	18-20-22	18-20-22	20-23-26	20-23-26
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	34-37-40-43	34-37-40-43	39-42-45	39-42-45	41-45-49	41-45-49
	Sound Level (PWL)		dB(A)	60	60	64	64	65	65
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	46	46	67	67	105	111
	Air Volume	Cooling	m³/min	45	45	55	55	110	110
Heating		m³/min	45	45	55	55	110	110	
Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	
	Heating	dB(A)	46	46	49	49	51	51	
Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	
	Heating	dB(A)	65	65	67	67	69	69	
Operating Current(Max)		A	13	13	19	19	20	8	
	Breaker Size		A	16	16	25	25	32	16
Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	55	55	100	100
	Max.Height	Out-In	m	30	30	30	30	30	30
	Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PKA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump				
Indoor Unit				PKA-M100KA(L)2				
Outdoor Unit				PUZ-M100VKA2		PUZ-M100YKA2		
Refrigerant ⁽¹⁾				R32				
Power Source				Outdoor power supply				
Supply Outdoor(V/Phase/Hz)				VKA-VHA:230/Single/50, YKA:400/Three/50				
Cooling	Capacity	Rated	kW	9.5		9.5		
		Min-Max	kW	4.0 - 10.6		4.0 - 10.6		
	Total Input	Rated	kW	2.941		2.941		
	EER			3.23		3.23		
	Design load		kW	9.5		9.5		
	Annual electricity consumption ⁽²⁾		kWh/a	573		573		
	SEER ⁽⁴⁾			5.8		5.8		
	Energy efficiency class			A+		A+		
	Heating	Capacity	Rated	kW	11.2		11.2	
			Min-Max	kW	2.8 - 12.5		2.8 - 12.5	
Total Input		Rated	kW	3.284		3.284		
COP				3.41		3.41		
Design load			kW	8.0		8.0		
Declared Capacity		at reference design temperature	kW	6.0 (-10°C)		6.0 (-10°C)		
		at bivalent temperature	kW	7.0 (-7°C)		7.0 (-7°C)		
		at operation limit temperature	kW	4.5 (-15°C)		4.5 (-15°C)		
Back up heating capacity			kW	2.0		2.0		
Annual electricity consumption ⁽²⁾			kWh/a	2780		2780		
SCOP ⁽⁴⁾			4.0		4.0			
Energy efficiency class			A+		A+			
Operating Current(Max)				A	20.6		12.1	
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.08 / 0.07		0.08 / 0.07	
	Operating Current(Max)			A	0.57		0.57	
	Dimensions		H*W*D	mm	365-1170-295		365-1170-295	
	Weight			kg	21		21	
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	20-23-26		20-23-26	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	41-45-49		41-45-49	
	Sound Level (PWL)			dB(A)	65		65	
	Dimensions		H*W*D	mm	981-1050-330 (+40)		981-1050-330(+40)	
Outdoor Unit	Weight			kg	76		78	
	Air Volume	Cooling	m³/min	79		79		
		Heating	m³/min	79		79		
	Sound Level (SPL)	Cooling	dB(A)	51		51		
		Heating	dB(A)	54		54		
	Sound Level (PWL)	Cooling	dB(A)	70		70		
		Heating	dB(A)	70		70		
	Operating Current(Max)			A	20.0		11.5	
	Breaker Size			A	32		16	
	Ext.Piping	Diameter ⁽³⁾		Liquid/Gas	mm	9.52 / 15.88		9.52 / 15.88
Max.Length		Out-In	m	55		55		
Max.Height		Out-In	m	30		30		
Guaranteed Operating Range (Outdoor)		Cooling ⁽³⁾	°C	-15 ~ +46		-15 ~ +46		
		Heating	°C	-15 ~ +21		-15 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2



PKA-M60/71/100KA(L)2

Outdoor Unit

R410A

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M · LAL2 only

(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA(L)/KA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	—	—	—	—	35x2	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E	—	MSDT-111R-E			MSDF-1111R-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2



PKA-M60/71/100KA(L)2

Outdoor Unit

R410A

For Single



PUHZ-P100

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-P100/125/140



PUHZ-P200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M · LAL2 only

(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA/KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single									For Twin						For Triple			For Quadruple	
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P)	—	—	—	—	100x1	—	—	—	—	—	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E		MSDD-50WR-F	—	MSDT-111R-E			MSDF-1111R-E		

PKA-M SERIES

POWER INVERTER



Type			Inverter Heat Pump														
Indoor Unit			PKA-M35LA(L)I2			PKA-M50LA(L)I2		PKA-M60KA(L)I2		PKA-M71KA(L)I2		PKA-M100KA(L)I2		PKA-M100KA(L)I2			
Outdoor Unit			PUHZ-ZRP35VKA2			PUHZ-ZRP50VKA2			PUHZ-ZRP60VHA2			PUHZ-ZRP100VKA3			PUHZ-ZRP100YKA3		
Refrigerant ⁽¹⁾			R410A														
Power Source			Outdoor power supply														
Supply			VKA・VHA:230/Single/50, YKA:400/Three/50														
Cooling	Capacity		Rated	kW		3.6		4.6		6.1		7.1		9.5		9.5	
			Min-Max	kW		1.6 - 4.5		2.3 - 5.4		2.7 - 6.7		3.3 - 8.1		4.9 - 11.4		4.9 - 11.4	
	Total Input		Rated	kW		0.940		1.424		1.601		1.802		2.398		2.398	
	EER					3.80		3.23		3.81		3.94		3.96		3.96	
	Design load			kW		3.6		4.6		6.1		7.1		9.5		9.5	
	Annual electricity consumption ⁽²⁾			kWh/a		206		263		324		367		522		532	
	SEER ⁽⁴⁾					6.1		6.1		6.5		6.7		6.3		6.2	
	Energy efficiency class					A++		A++		A++		A++		A++		A++	
Heating	Capacity		Rated	kW		4.1		5.0		7.0		8.0		11.2		11.2	
			Min-Max	kW		1.6 - 5.2		2.5 - 7.3		2.8 - 8.2		3.5 - 10.2		4.5 - 14.0		4.5 - 14.0	
	Total Input		Rated	kW		1.070		1.501		1.960		2.191		3.043		3.043	
	COP					3.83		3.33		3.57		3.65		3.68		3.68	
	Design load			kW		2.4		3.3		4.4		4.7		7.8		7.8	
	Declared Capacity		at reference design temperature	kW		2.4 (-10°C)		3.3 (-10°C)		4.4 (-10°C)		4.7 (-10°C)		7.8 (-10°C)		7.8 (-10°C)	
			at bivalent temperature	kW		2.4 (-10°C)		3.3 (-10°C)		4.4 (-10°C)		4.7 (-10°C)		7.8 (-10°C)		7.8 (-10°C)	
			at operation limit temperature	kW		2.2 (-11°C)		3.2 (-11°C)		2.8 (-20°C)		3.5 (-20°C)		5.8 (-20°C)		5.8 (-20°C)	
	Back up heating capacity			kW		0.0		0.0		0.0		0.0		0.0		0.0	
	Annual electricity consumption ⁽²⁾			kWh/a		841		1126		1466		1529		2659		2660	
	SCOP ⁽⁴⁾					3.9		4.1		4.2		4.3		4.1		4.1	
	Energy efficiency class					A		A+		A+		A+		A+		A+	
Operating Current(Max)				A		13.4		13.4		19.4		19.4		27.1		8.6	
Indoor Unit	Input [cooling / Heating]		Rated	kW		0.04 / 0.03		0.04 / 0.03		0.06 / 0.05		0.06 / 0.05		0.08 / 0.07		0.08 / 0.07	
	Operating Current(Max)			A		0.35		0.35		0.43		0.43		0.57		0.57	
	Dimensions		H*W*D	mm		299-898-237		299-898-237		365-1170-295		365-1170-295		365-1170-295		365-1170-295	
	Weight			kg		12.6		12.6		21		21		21		21	
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min		7.5-8.2-9.2-10.9		7.5-8.2-9.2-10.9		18-20-22		18-20-22		20-23-26		20-23-26	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)		34-37-40-43		34-37-40-43		39-42-45		39-42-45		41-45-49		41-45-49	
	Sound Level (PWL)			dB(A)		60		60		64		64		65		65	
	Dimensions		H*W*D	mm		630-809-300		630-809-300		943-950-330(+30)		943-950-330(+30)		1338-1050-330(+40)		1338-1050-330(+40)	
Outdoor Unit	Weight			kg		43		46		70		70		116		123	
	Air Volume		Cooling	m³/min		45		45		55		55		110		110	
			Heating	m³/min		45		45		55		55		110		110	
	Sound Level (SPL)		Cooling	dB(A)		44		44		47		47		49		49	
			Heating	dB(A)		46		46		48		48		51		51	
	Sound Level (PWL)		Cooling	dB(A)		65		65		67		67		69		69	
	Operating Current(Max)			A		13		13		19		19		26.5		8	
	Breaker Size			A		16		16		25		25		32		16	
	Ext.Piping Diameter ⁽⁵⁾		Liquid/Gas	mm		6.35 / 12.7		6.35 / 12.7		9.52 / 15.88		9.52 / 15.88		9.52 / 15.88		9.52 / 15.88	
	Max.Length		Out-In	m		50		50		50		50		75		75	
Max.Height		Out-In	m		30		30		30		30		30		30		
Guaranteed Operating Range (Outdoor)			Cooling ⁽³⁾	°C		-15 ~ +46		-15 ~ +46		-15 ~ +46		-15 ~ +46		-15 ~ +46		-15 ~ +46	
			Heating	°C		-11 ~ +21		-11 ~ +21		-20 ~ +21		-20 ~ +21		-20 ~ +21		-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PKA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump				
Indoor Unit				PKA-M100KA(L)I2				
Outdoor Unit				PUHZ-P100VKA		PUHZ-P100YKA		
Refrigerant ^(*)1)				R410A				
Power Source				Outdoor power supply				
Supply				VKA・VHA:230/Single/50, YKA:400/Three/50				
Cooling				Capacity	Rated	kW	9.4	9.4
					Min-Max	kW	3.7 - 10.6	3.7 - 10.6
				Total Input	Rated	kW	3.122	3.122
				EER			3.01	3.01
				Design load		kW	9.4	9.4
				Annual electricity consumption ^(*)2)		kWh/a	586	586
				SEER ^(*)4)			5.6	5.6
					Energy efficiency class		A+	A+
				Heating				Capacity
	Min-Max	kW	2.8 - 12.5					2.8 - 12.5
Total Input	Rated	kW	3.489					3.489
COP			3.21					3.21
Design load		kW	8.0					8.0
Declared Capacity	at reference design temperature	kW	6.0 (-10°C)					6.0 (-10°C)
	at bivalent temperature	kW	7.0 (-7°C)					7.0 (-7°C)
	at operation limit temperature	kW	4.5 (-15°C)					4.5 (-15°C)
Back up heating capacity		kW	2.0					2.0
Annual electricity consumption ^(*)3)		kWh/a	2799					2799
SCOP ^(*)4)			4.0					4.0
	Energy efficiency class		A+					A+
Operating Current(Max)				A	20.6	12.1		
Indoor Unit				Input [cooling / Heating]	Rated	kW	0.08 / 0.07	0.08 / 0.07
				Operating Current(Max)		A	0.57	0.57
				Dimensions	H*W*D	mm	365-1170-295	365-1170-295
				Weight		kg	21	21
				Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-23-26	20-23-26
				Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	41-45-49	41-45-49
				Sound Level (PWL)		dB(A)	65	65
Outdoor Unit				Dimensions	H*W*D	mm	981-1050-330	981-1050-330
				Weight		kg	76	78
				Air Volume	Cooling	m³/min	79	79
					Heating	m³/min	79	79
				Sound Level (SPL)	Cooling	dB(A)	51	51
					Heating	dB(A)	54	54
				Sound Level (PWL)	Cooling	dB(A)	70	70
				Operating Current(Max)		A	20	11.5
				Breaker Size		A	32	16
				Ext.Piping				Diameter ^(*)5)
Max.Length	Out-In	m	50					50
Max.Height	Out-In	m	30					30
Guaranteed Operating Range (Outdoor)				Cooling ^(*)3)		°C	-15 ~ +46	-15 ~ +46
				Heating		°C	-15 ~ +21	-15 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.</