

SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units.
Easily construct a system that best matches room air conditioning needs.

R32 INDOOR UNIT		R32 OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA  Wall-mounted PKA-M LA(L) PKA-M KA(L)  Ceiling-concealed PEA-M  Floor-standing PSA-M		Power Inverter  PUZ-ZM35/50  PUZ-ZM60/71  PUZ-ZM100/125/140/ 200/250	Standard Inverter  SUZ-M35  SUZ-M50  SUZ-M60/71  PUZ-M100/125/140  PUZ-M200/250

* Some indoor units cannot be used with this unit.



R410A INDOOR UNIT		R410A OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA  Wall-mounted PKA-M LA(L) PKA-M KA(L)  Floor-standing PSA-M  Ceiling-concealed PEA-M		Power Inverter  PUHZ-ZRP35/50  PUHZ-ZRP60/71  PUHZ-ZRP100/125/140/ 200/250	Standard Inverter  SUZ-KA35  SUZ-KA50/60/71  PUHZ-P100/125/140  PUHZ-P200/250

To confirm compatibility with the MXZ Series, refer to the MXZ Series page.

* Some indoor units cannot be used with this unit.

SELECT COMBINATION

Choose the installation pattern for the indoor units. (In the case of a multi-system, distribution piping is necessary, so please select the necessary piping as well.)

Single System 	Simultaneous Multi-System Twin Allows simultaneous operation of two indoor units on one floor.   Triple Can cover a large-scale space or dispersed installation on the same floor.	Quadruple Realises the optimum temperature distribution even in a large space. 
--	--	--


Connectable Combinations for Inverter Units

Outdoor Unit Capacity	Indoor Unit Capacity		
	Twin 50 : 50	Triple 33 : 33 : 33	Quadruple 25 : 25 : 25 : 25
71	35 × 2	—	—
100	50 × 2	—	—
125	60 × 2	—	—
140	71 × 2	50 × 3	—
200	100 × 2	60 × 3	50 × 4
250	125 × 2	71 × 3	60 × 4
Distribution Pipe	MSDD-50TR-E MSDD-50WR-E MSDD-50TR2-E2 MSDD-50WR2-E	MSDT-111R-E MSDT-111R3-E	MSDF-1111R-E MSDF-1111R2-E

Note: The distribution pipe listed is required for simultaneous multi-systems.

Power Inverter SERIES

Our Eco-conscious Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency through use of New R32 refrigerant and advanced technologies.

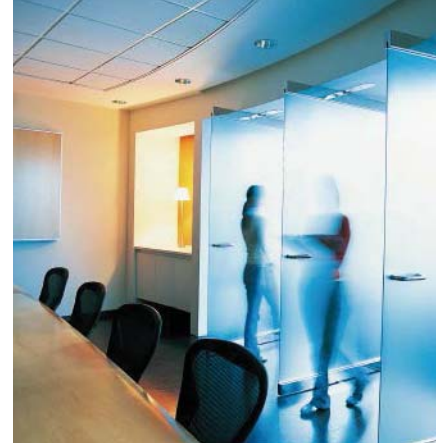

R32



PUZ-ZM35/50VKA2

R32



PUZ-ZM60/71VHA2


R32



PUZ-ZM100/125/140V(Y)KA2
PUZ-ZM200/250YKA2

Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.

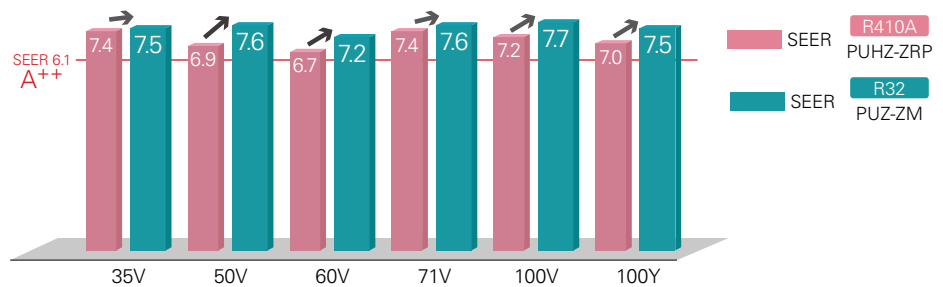


Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

Longer piping (60/71/100/125/140/200/250)


Longer piping length realised for 60, 71, 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Piping Length	
	R410A PUHZ-ZRP	R32 PUZ-ZM
35/50	50m	50m
60/71	50m	55m
100/125/140	75m	100m
200/250	100m	100m

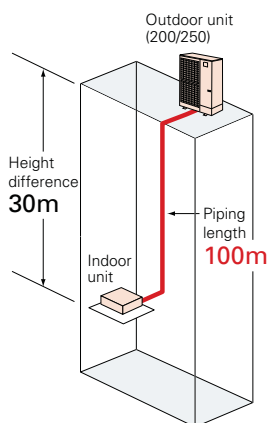

Rated heating capacity maintained down to -3°C*

Rated heating capacity maintained even when the outside temperature is down to -3°C. Stay warm even at times of cold weather.

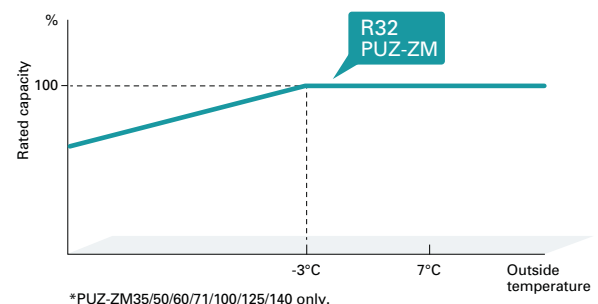

*PUZ-ZM35/50/60/71/100/125/140 only.

2+1 Back-up rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.




Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.

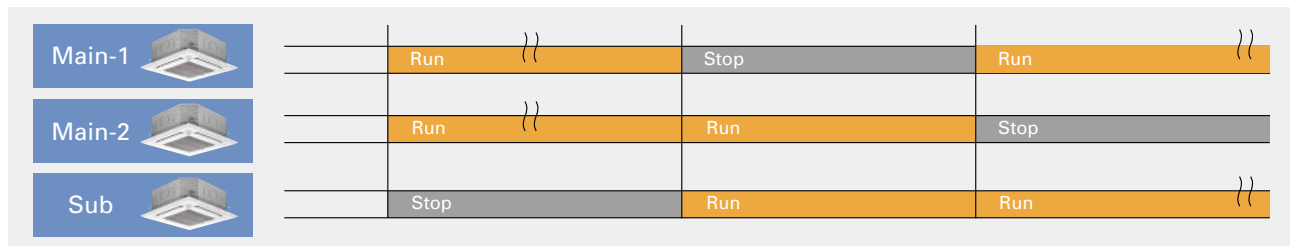

Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

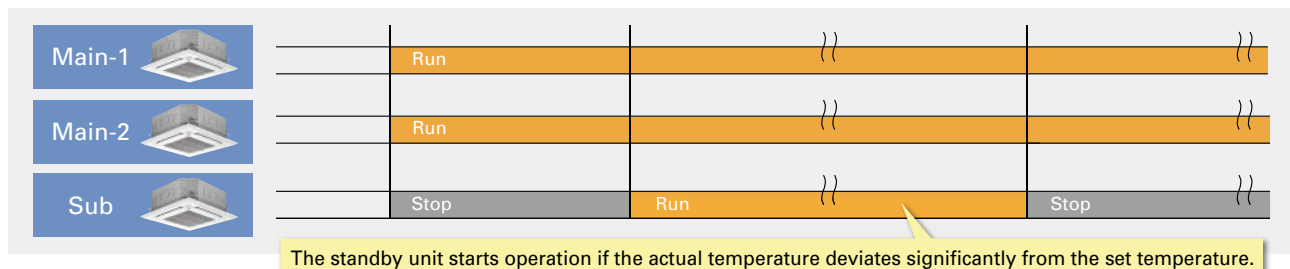


Extended cooling set temperature range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19–30°C. to 14–30°C.

*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

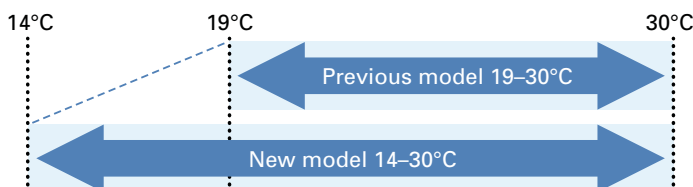

Display of model names and serial numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Model name display (example)

Collect model names and S/N	
OU	PUZ-ZM200YKA2
IU1	PLA-ZM50EA2
IU2	PLA-ZM50EA2
IU3	PLA-ZM50EA2
IU4	PLA-ZM50EA2
Collect data: ✓	
—Address +	S/N

●Serial number display (example)

Collect model names and S/N	
OU	1ZU00001
IU1	1ZA00001
IU2	1ZA00002
IU3	1ZA00003
IU4	1ZA00004
Collect data: ✓	
—Address +	Model

Preliminary error history*

In addition to error history, the history of preliminary abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Error history (Sample)

Error history 1/4			
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0	0-1	20/12/20	AM 1:23
E0	0-1	20/11/20	PM10:55
E0	0-1	20/10/20	PM12:01
Error history menu:			
▼ Page ▲		Delete	

●Preliminary error history (Sample)

Preliminary error hist. 1/8			
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0	0-1	20/12/20	AM 1:23
E0	0-1	20/11/20	PM10:55
E0	0-1	20/10/20	PM12:01
Error history menu:			
▼ Page ▲		Delete	

Display of power consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

< Data Collection Period >

Time data: Every 30 minutes over the past month

Monthly/daily data: Monthly over the past 14 months

Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

●Every 30 minutes (example)

Energy data			
2019- 1- 1	1234.5kWh	1/6	
0:30 123.4kWh	2:30 123.4kWh		
1:00 123.4kWh	3:00 123.4kWh		
1:30 123.4kWh	3:30 123.4kWh		
2:00 123.4kWh	4:00 123.4kWh		
Return:			
- Date +		▼ Page ▲	

●Daily (example)

Energy data			
2019- 1	123456.7kWh	1/4	
31 1234.5kWh	27 1234.5kWh		
30 1234.5kWh	26 1234.5kWh		
29 1234.5kWh	25 1234.5kWh		
28 1234.5kWh	24 1234.5kWh		
Return:			
▼ Page ▲			

●Monthly (example)

Energy data			
▶2019- 1	123456.7kWh	1/3	
2018-12	123456.7kWh		
2018-11	123456.7kWh		
2018-10	123456.7kWh		
2018- 9	123456.7kWh		
View daily data: ☒			
▼ Cursor ▲			

Improved defrosting performance*


*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Avoiding Simultaneous Defrosting


When each of multiple units is in operation for heating in the same space, these may start defrosting at the same time, resulting in a drop in the room temperature. Therefore, we have developed a new function that controls up to four-refrigerant air conditioning system to avoid simultaneous defrosting. By ensuring that defrosting is only performed by one unit at a time, it is possible to minimize any decrease in room temperature.

Example System Configuration

Four sets controlled by a single remote controller

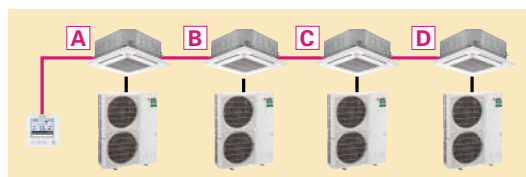


■When All Sets Are Controlled Together

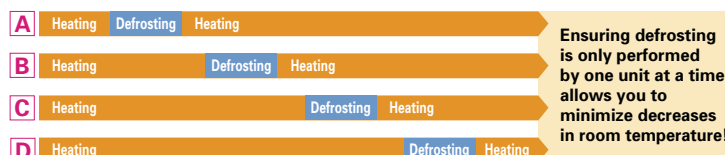

Defrosting When People Are Absent


The use of the 3D i-see sensor allows a more comfortable defrosting schedule. After a large amount of frost has built up, the system will switch to defrosting when the 3D i-see sensor detects that no people are present. By minimizing defrosting while people are in the room, there is a much lower chance of a temperature drop while the room is occupied.

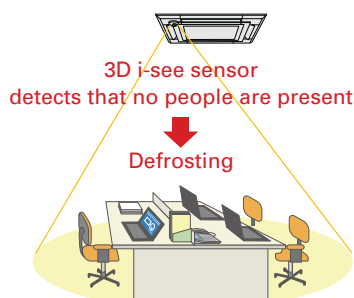

* Only compatible with 4-way cassette and 2x2 cassette models with an attached 3D i-see sensor panel. Even though people are present in the room, the defrosting process may start if all defrosting conditions are met.

Defrosting When Operation is Stopped

It takes a long time to start operation if there is an excess build-up of frost. Therefore, each unit is equipped with a control system where defrosting is performed immediately after operation is stopped when there is a large amount of frost. This allows heating to be quickly started the next day.

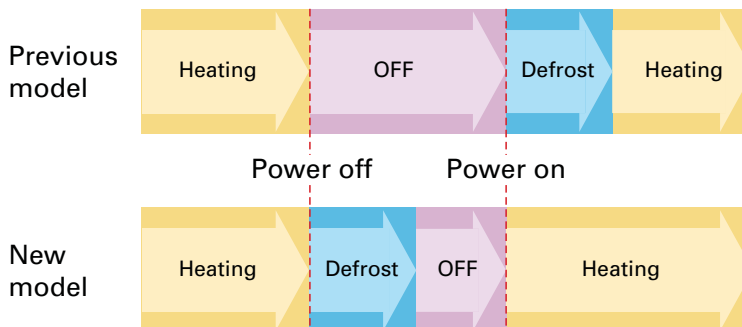

PEAD SERIES

R32
R410A

PEAD-M35/50/60/71/100/125/140JA2


Energy efficiency has been improved. A reduced electricity consumption contributes to a further reduction in operating cost. The thin body with a wide-ranged external static pressure of this series is the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space.



ErP Lot-10 compliant, Achieving High Energy Efficiency



The shape of fan wing and casing is improved to provide more smooth air flow, increasing the operation efficiency. All models under 12kW(M35~M100) are complied with ErP Lot 10 and energy rankings of A++ for cooling and A+ for heating. This contributes to a reduction in the cost of annual electricity.

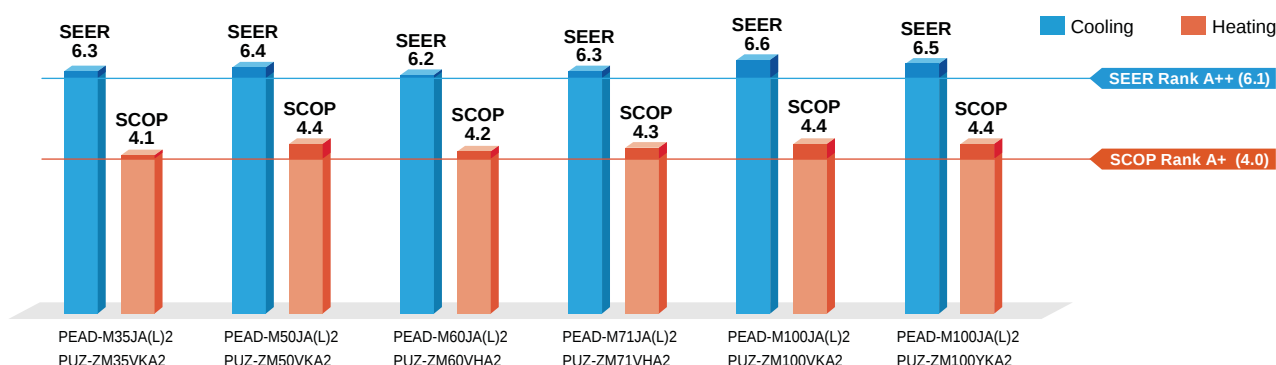

Compact Indoor Units

The height of the models from 35-140 has been unified to 250 mm, which makes installation in low ceiling with minimal clearance space possible.


Selectable Static Pressure Levels

External static pressure conversion can be set up to five levels. Capable of being set to a maximum of 150 Pa, units are applicable to a wide range of building types.

Drain Pump is Optionally Selectable

The line-up consists of two types: models with or without a built-in drain pump, thus allowing more freedom in piping design.

- PEAD-M JA2 ▶ Built-in drain pump
- PEAD-M JAL2 ▶ No drain pump

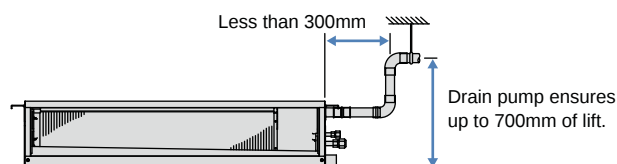

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment or PQ box is required.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*

* PAR-SC9CA-E is also required.

PEAD-M JA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E				MSDD-50WR2-E		MSDT-111R3-E			MSDF-111R2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R32

For Single



SUZ-M35



SUZ-M50



SUZ-M60/71



PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*


* PAR-SC9CA-E is also required.

PEAD-M JA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WB2-E		MSDT-111R3-E			MSDF-111B2-E	

PEAD-M SERIES

POWER INVERTER



Type			Inverter Heat Pump									
Indoor Unit			PEAD-M35JA1L2	PEAD-M50JA1L2	PEAD-M60JA1L2	PEAD-M71JA1L2	PEAD-M100JA1L2	PEAD-M100JA1L2	PEAD-M125JA1L2	PEAD-M125JA1L2	PEAD-M140JA1L2	PEAD-M140JA1L2
Outdoor Unit			PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM125VKA2	PUZ-ZM140VKA2	PUZ-ZM140VKA2
Refrigerant ⁽¹⁾			R32									
Power Supply			Outdoor power supply VKA-VHA:230/Single/50, YKA:400/Three/50									
Cooling	Source Outdoor(V/Phase/Hz)											
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4
	Min-Max		kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.3
	Total Input	Rated	kW	0.837	1.190	1.487	1.775	2.261	2.261	3.333	3.333	3.701
	EER ⁽⁴⁾			4.30	4.20	4.10	4.00	4.20	4.20	3.75	3.75	3.62
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—
	Annual electricity consumption ⁽¹²⁾		kWh/a	199	273	342	393	499	510	—	—	—
	SEER ⁽⁴⁾⁽¹⁵⁾			6.3	6.4	6.2	6.3	6.6	6.5	—	—	—
	Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0
Heating	Min-Max		kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0
	Total Input	Rated	kW	0.911	1.363	1.590	1.904	2.545	2.545	3.763	3.763	4.102
	COP ⁽⁴⁾			4.50	4.40	4.40	4.20	4.40	4.40	3.72	3.72	3.90
	Design load		kW	2.4	3.8	4.4	4.9	7.8	7.8	—	—	—
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—
	Annual electricity consumption ⁽¹²⁾		kWh/a	816	1202	1459	1585	2469	2470	—	—	—
	SEER ⁽⁴⁾⁽¹⁵⁾			4.1	4.4	4.2	4.3	4.4	4.4	—	—	—
Operating	Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—
	Current(Max)		A	14.2	14.4	20.9	20.9	22.3	10.3	28.8	11.3	32.6
	Input [cooling / Heating]	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21
	Operating Current(Max)		A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732
	Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	42(41)	42(41)
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0
	External Static Pressure ⁽⁷⁾		Pa	35<50><70><100><150>	35<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41
	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66
Outdoor Unit	Dimensions	H*W*D	mm	630-890-300	630-890-300	943-950-330(+25)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	46	46	67	67	105	111	105	114	118
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50
		Heating	dB(A)	46	46	49	49	51	51	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70
		Heating	dB(A)	65	65	67	67	69	69	70	70	70
	Operating Current(Max)		A	13	13	19	19	20	8	26.5	9	30
	Breaker Size		A	16	16	25	25	32	16	32	16	40
Ext.Piping	Diameter ⁽⁶⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	55	55	100	100	100	100	100
	Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)			Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.


*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < > .

PEAD-M SERIES

STANDARD INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PEAD-M35JA1L2	PEAD-M50JA1L2	PEAD-M60JA1L2	PEAD-M71JA1L2	PEAD-M100JA1L2	PEAD-M100JA1L2	PEAD-M125JA1L2	PEAD-M125JA1L2	PEAD-M140JA1L2	PEAD-M140JA1L2	
Outdoor Unit			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100VKA2	PUZ-M125VKA2	PUZ-M125VKA2	PUZ-M140VKA2	PUZ-M140VKA2	
Refrigerant ⁽¹⁾			R32										
Power Supply			Outdoor power supply VA-VKA:230/Single/50, YKA:400/Three/50										
Cooling	Source Outdoor(V/Phase/Hz)												
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
		Min-Max	kW	0.8 - 3.9	1.7 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	6.0 - 13.0	6.0 - 13.0	6.1 - 14.1	6.1 - 14.1
	Total Input	Rated	kW	0.923	1.351	1.694	2.028	2.878	2.878	4.019	4.019	4.768	4.768
	EER ⁽⁴⁾			3.90	3.70	3.60	3.50	3.30	3.30	3.01	3.01	2.81	2.81
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
	Annual electricity consumption ⁽¹²⁾		kWh/a	199	277	345	397	538	538	—	—	—	—
SEER ⁽⁴⁾⁽¹⁵⁾			6.3	6.3	6.1	6.2	6.1	6.1	—	—	—	—	
Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—	—	
Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
	Total Input	Rated	kW	1.025	1.463	1.842	2.105	2.947	2.947	3.739	3.739	4.155	4.155
	COP ⁽⁴⁾			4.00	4.10	3.80	3.80	3.80	3.80	3.61	3.61	3.61	3.61
	Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—
		at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—
		at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—
	Back up heating capacity		kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—
	Annual electricity consumption ⁽¹²⁾		kWh/a	884	1417	1558	1973	2725	2725	—	—	—	—
SCOP ⁽⁴⁾⁽¹⁵⁾			4.1	4.2	4.1	4.1	4.1	4.1	—	—	—	—	
Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—	—	
Operating Current(Max)			A	9.7	14.9	16.7	16.7	22.3	13.8	27.8	12.8	31.4	12.9
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21
	Operating Current (Max)		A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732	
	Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	42(41)	42(41)	
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0	29.5-35.5-40.0
	External Static Pressure ⁽⁷⁾		Pa	35<50><70><100><150>	35<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>	40<50><70><100><150>
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41
	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66	66
	Dimensions	H*W*D	mm	550-800-285	714-800-285	880-840-330	880-840-330	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)
	Weight		kg	35	41	54	55	76	78	84	85	84	85
Outdoor Unit	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79	79	86	86	86	86
		Heating	m³/min	32.7	43.7	50.1	50.1	79	79	92	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55
		Heating	dB(A)	48	49	51	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73
		Heating											
	Operating Current(Max)		A	8.5	13.5	14.8	14.8	20	11.5	26.5	11.5	30	11.5
	Breaker Size		A	16	20	20	20	32	16	32	16	40	16
	Ext.Piping Diameter ⁽¹⁴⁾		Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length		Out-In	m	20	30	30	30	55	55	65	65	65
Max.Height		Out-In	m	12	30	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)			Cooling ⁽²¹⁾	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R410A

For Single



PUAZ-ZRP35/50



PUAZ-ZRP60/71



PUAZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUAZ-ZRP71



PUAZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*

* PAR-SC9CA-E is also required.

PEAD-M JA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR-E				MSDD-50WR-F		MSDT-111R-E			MSDF-1111R-F	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R410A

For Single



SUZ-KA35



SUZ-KA50/60/71



PUAZ-P100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUAZ-P100/125/140



PUAZ-P200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*


* PAR-SC9CA-E is also required.

PEAD-M JA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe		—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E		

PEAD-M SERIES

POWER INVERTER



Type		Inverter Heat Pump											
Indoor Unit		PEAD-M35JAILI2 PEAD-M50JAILI2 PEAD-M60JAILI2 PEAD-M71JAILI2 PEAD-M100JAILI2 PEAD-M100JAILI2 PEAD-M125JAILI2 PEAD-M125JAILI2 PEAD-M140JAILI2 PEAD-M140JAILI2											
Outdoor Unit		PUHZ-ZRP35VKA2 PUHZ-ZRP50VKA2 PUHZ-ZRP60VHA2 PUHZ-ZRP71VHA2 PUHZ-ZRP100VKA3 PUHZ-ZRP100VKA3 PUHZ-ZRP125VKA3 PUHZ-ZRP125VKA3 PUHZ-ZRP140VKA3 PUHZ-ZRP140VKA3											
Refrigerant ⁽¹⁾		R410A											
Power Supply		Outdoor power supply											
Cooling		VKA-VKA:230/Single/50, YKA:400/Three/50											
Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
	Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.3	6.2 - 15.3	
	Total Input	kW	0.870	1.420	1.630	1.990	2.410	2.430	3.834	3.834	4.322	4.322	
	EER ⁽⁴⁾		4.14	3.52	3.74	3.53 (3.57)	3.94	3.94	3.26	3.26	3.10	3.10	
	Design load	kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—	
Annual electricity consumption ⁽²⁾		kWh/a	205	287	340	411	542	553	—	—	—	—	
	SEER ⁽⁴⁾⁽⁵⁾		6.1	6.1	6.2	6.0	6.1	6.0	—	—	—	—	
Energy efficiency class			A++	A++	A++	A+	A++	A+	—	—	—	—	
Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0	
	Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0	
	Total Input	kW	0.950	1.500	1.790	2.030	2.600	2.600	3.508	3.508	4.071	4.071	
	COP ⁽⁴⁾		4.32	4.00	3.91	3.94	4.31	4.31	3.70 (3.99)	3.70 (3.99)	3.60	3.60	
	Design load	kW	2.4	3.8	4.4	4.9	7.8	7.8	—	—	—	—	
Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	
	at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	
	at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.7 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—	
Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—	
Annual electricity consumption ⁽²⁾		kWh/a	831	1232	1487	1718	2593	2594	—	—	—	—	
	SCOP ⁽⁴⁾⁽⁵⁾		4.0	4.3	4.1	3.9	4.2	4.2	—	—	—	—	
Energy efficiency class			A+	A+	A+	A	A+	A+	—	—	—	—	
Operating Current(Max)		A	14.2	14.4	20.9	20.9	28.8	10.3	28.8	11.8	30.6	15.6	
Indoor Unit	Input (cooling / Heating)	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.21	0.21	
	Operating Current(Max)	A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63	
Dimensions		H*W*D	mm	250x900x732	250x900x732	250x1100x732	250x1100x732	250x1400x732	250x1400x732	250x1400x732	250x1600x732	250x1600x732	
Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	38(37)	42(41)	42(41)	
Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0	29.5-35.5-40.0	
External Static Pressure ⁽⁷⁾		Pa	35<-50>-<70>-<100>-<150>	35<-50>-<70>-<100>-<150>	40<-50>-<70>-<100>-<150>	40<-50>-<70>-<100>-<150>	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41	
Sound Level (Lo-Mid-Hi) (SPL)	Cooling	dB(A)	24-29-32	27-33-35	26-32-37	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41	
	Heating	dB(A)	54	58	56	58	62	62	66	66	66	66	
Sound Level (PWL)	Cooling	dB(A)	54	58	56	58	62	62	66	66	66	66	
	Heating	dB(A)	54	58	56	58	62	62	66	66	66	66	
Operating Current(Max)	Rated	A	13	13	19	19	26.5	8	26.5	9.5	28	13	
	Breaker Size	A	16	16	25	25	32	16	32	16	40	16	
Ext.Piping	Diameter ⁽⁶⁾	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max.Length	m	50	50	50	50	75	75	75	75	75	75	
Guaranteed Operating Range (Outdoor)		Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.


*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < .

PEAD-M SERIES

STANDARD INVERTER



Type			Inverter Heat Pump											
Indoor Unit			PEAD-M35JAILI2	PEAD-M50JAILI2	PEAD-M60JAILI2	PEAD-M71JAILI2	PEAD-M100JAILI2	PEAD-M100JAILI2	PEAD-M125JAILI2	PEAD-M125JAILI2	PEAD-M140JAILI2	PEAD-M140JAILI2		
Outdoor Unit			SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	PUHZ-P100VKA	PUHZ-P100VKA	PUHZ-P125VKA	PUHZ-P125VKA	PUHZ-P140VKA	PUHZ-P140VKA		
Refrigerant ⁽¹⁾			R410A											
Power Supply			Outdoor power supply											
Cooling			VA-VKA:230/Single/50, YKA:400/Three/50											
	Capacity	Rated	kW	3.6	4.9	5.7	7.1	9.4	9.4	12.1	12.1	13.6	13.6	
		Min-Max	kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 14.1	5.8 - 14.1	
	Total Input	Rated	kW	1.029	1.458	1.652	2.060	2.965	2.965	4.143	4.143	5.551	5.551	
	EER ⁽⁴⁾			3.50	3.36	3.45	3.45	3.17	3.17	2.92	2.92	2.45	2.45	
	Design load		kW	3.6	4.9	5.7	7.1	9.4	9.4	—	—	—	—	
	Annual electricity consumption ⁽¹²⁾		kWh/a	210	284	326	395	596	596	—	—	—	—	
	SEER ⁽⁴⁾⁽¹⁵⁾			6.0	6.0	6.1	6.2	5.5	5.5	—	—	—	—	
	Energy efficiency class			A+	A+	A++	A++	A	A	—	—	—	—	
	Heating	Capacity	Rated	kW	4.1	5.9	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
			Min-Max	kW	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8
Total Input		Rated	kW	1.111	1.620	1.928	2.040	2.947	2.947	3.739	3.739	4.347	4.347	
COP ⁽⁴⁾				3.69	3.64	3.63	3.80	3.80	3.80	3.61	3.61	3.45	3.45	
Design load			kW	2.8	4.4	4.5	6.0	8.0	8.0	—	—	—	—	
Declared Capacity		at reference design temperature	kW	2.5 (-10°C)	3.9 (-10°C)	4.1 (-10°C)	5.3 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—	
		at bivalent temperature	kW	2.5 (-7°C)	3.9 (-7°C)	4.1 (-7°C)	5.3 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—	
		at operation limit temperature	kW	2.5 (-10°C)	3.9 (-10°C)	4.1 (-10°C)	5.3 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—	
Back up heating capacity			kW	0.3	0.5	0.4	0.7	2.0	2.0	—	—	—	—	
Annual electricity consumption ⁽¹²⁾			kWh/a	975	1455	1559	2132	2797	2797	—	—	—	—	
SCOP ⁽⁴⁾⁽¹⁵⁾			4.0	4.2	4.0	3.9	4.0	4.0	—	—	—	—		
Energy efficiency class			A+	A+	A+	A	A+	A+	—	—	—	—		
Operating Current(Max)			A	9.4	13.4	15.9	18.0	22.3	13.8	27.8	12.8	31.4	12.9	
Indoor Unit	Input (cooling / Heating)	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21	
	Operating Current(Max)		A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63	
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732		
	Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	42(41)	42(41)		
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0	29.5-35.5-40.0	
	External Static Pressure ⁽⁷⁾		Pa	35<-50>-<70>-<100>-<150>	35<-50>-<70>-<100>-<150>	40<-50>-<70>-<100>-<150>	40<-50>-<70>-<100>-<150>	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41	
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41	
	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66	66	
	Dimensions	H*W*D	mm	550-800-285	880-840-330	880-840-330	880-840-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	
	Weight		kg	35	54	50	53	76	78	84	85	84	85	
Outdoor Unit	Air Volume	Cooling	m³/min	36.3	44.6	40.9	50.1	79	79	86	86	86	86	
		Heating	m³/min	34.8	44.6	49.2	48.2	79	79	92	92	92	92	
	Sound Level (SPL)	Cooling	dB(A)	49	52	55	55	51	51	54	54	56	56	
		Heating	dB(A)	50	52	55	55	54	54	56	56	57	57	
	Sound Level (PWL)	Cooling	dB(A)	62	65	65	69	70	70	72	72	75	75	
	Operating Current(Max)		A	8.2	12	14	16.1	20	11.5	26.5	11.5	30	11.5	
	Breaker Size		A	10	20	20	20	32	16	32	16	40	16	
	Ext.Piping	Diameter ⁽⁶⁾	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max.Length	Out-In	m	20	30	30	30	50	50	50	50	50	50	
	Max.Height	Out-In	m	12	30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)			Cooling ⁽¹³⁾	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21		