

SELECTION

Series line-up consists of two types of indoor units.
Choose the model that best matches room conditions.

SELECT INDOOR UNIT

Select the optimal unit and capacity required to match room construction and air conditioning requirements.

R32
R410A




Units without Remote Controller

SLZ-M15FA2
(Multi split series connection only)
SLZ-M25FA2
SLZ-M35FA2
SLZ-M50FA2
SLZ-M60FA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Plasma Quad Connect
SLP-2FA				
SLP-2FAL	✓			
SLP-2FAE		✓		
SLP-2FALE	✓	✓		
SLP-2FALM2	✓		✓	
SLP-2FALME2	✓	✓	✓	
SLP-2FAP				✓
SLP-2FALP	✓			✓
SLP-2FALMP2	✓		✓	✓

R32
R410A

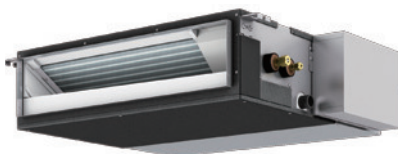

Units without Remote Controller

SEZ-M25DA2
SEZ-M35DA2
SEZ-M50DA2
SEZ-M60DA2
SEZ-M71DA2

Units with Wireless Remote Controller

SEZ-M25DAL2
SEZ-M35DAL2
SEZ-M50DAL2
SEZ-M60DAL2
SEZ-M71DAL2

R32



Units without Remote Controller

SFZ-M25VA
SFZ-M35VA
SFZ-M50VA
SFZ-M60VA
SFZ-M71VA

SELECT OUTDOOR UNIT

There is one outdoor unit for respective indoor units.

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

*To confirm compatibility with the MXZ Series multi-type system, refer to the MXZ Series page.

SEZ_{SERIES}




SEZ-M25-71DA(L)2

This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.




High Energy Efficiency




Highly efficient indoor units with DC inverter contribute to a reduction in electricity consumption throughout a year. The SEZ series has achieved energy-saving performance of "A+" or higher when connected to PUZ series and "A" or higher when connected to SUZ-M series.

Power Inverter

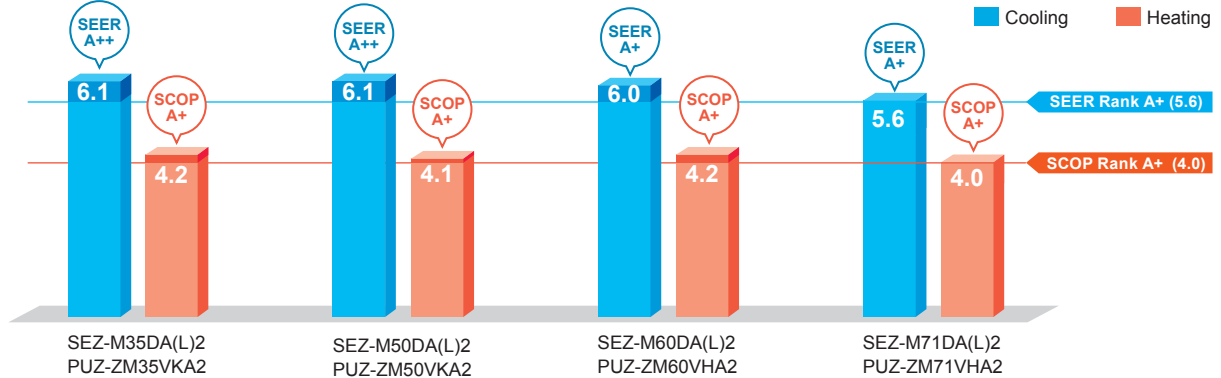


Standard Inverter

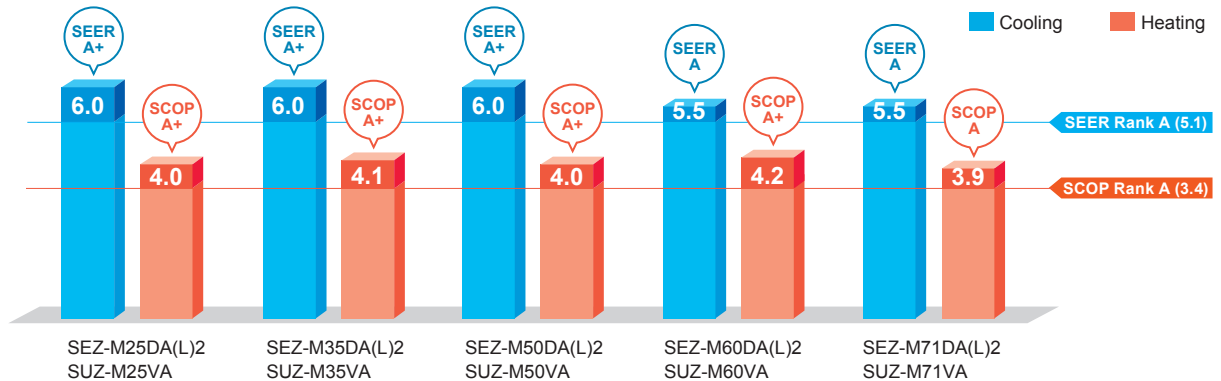


Lineup of Compatible Outdoor Unit has been Expanded by Power Inverter Series

Although models in the SEZ series were previously only compatible with the standard inverter, they can now also be connected to small capacity power inverters. The ability to connect to a power inverter with high-performance specifications makes it possible to offer an even wider range of solutions to our customers.

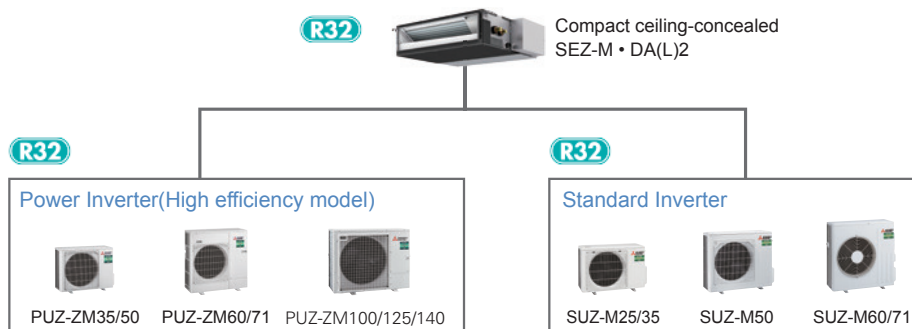

Compact Design with a Height of 200 mm

The height of the units is 200 mm for all capacity ranges. Its thin body is suitable for installation in low ceilings with a small cavity space.

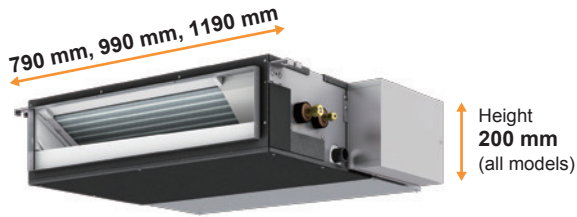

SEZ-M DA(L)2		M25	M35	M50	M60	M71
Height	mm	200				
Width	mm	790	990	1190		

Low Noise Operation

Low noise operation contributes to a peaceful indoor environment. The SPL of M25/35 model, which is the quietest model among the new series, is as low as 22 dB (ESP 5 Pa, low fan speed setting).

Capacity		M25	M35	M50	M60	M71
Sound pressure level	High	29	30	36	37	39
	Mid	25	26	33	33	34
	Low	22	22	29	29	29

*When fan speed setting is low, the cooling/heating capacity is subject to reduce.

*Operation noise may increase due to the installation environment or the operation status.

Selectable Static Pressure Levels


External static pressure can be selected from 5, 25, 35, and 50 Pa (set to 25 Pa at the time of factory shipment).

Four levels Available for All Models

Drain Pump (Optional)


The PAC-KE07DM-E drain pump is available as an option. The drain connection can be raised as high as 580 mm, allowing more freedom in piping layout design.

*The use of drain pump may increase the operation noise.

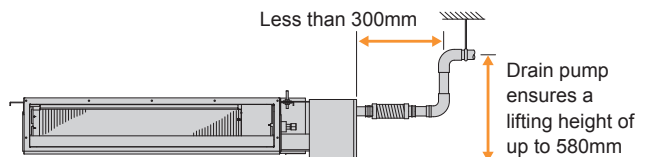

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment PAC-HA11PAR is required.

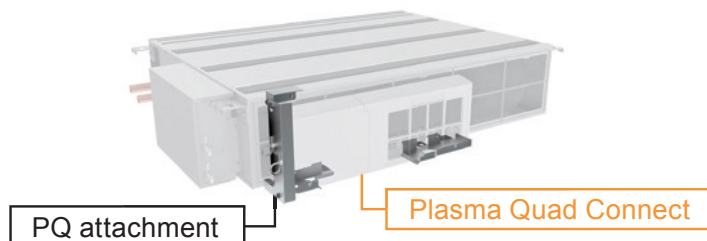


SEZ-M SERIES



Indoor Unit

R32
R410A

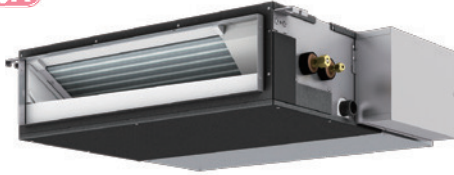

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

R32 For Single

R32 For Multi
(Twin/Triple/Quadruple)



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM71



PUZ-ZM100/125/140

Remote Controller



Enclosed in
SEZ-M DAL2



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



Indoor Unit Combination	Outdoor Unit Capacity													
	For Single							For Twin			For Triple			For Quadruple
	35	50	60	71	100	125	140	71	100	125	100	125	140	125 140
Power Inverter (PUZ-ZM)	35x1	50x1	60x1	71x1	-	-	-	35x2	50x2	60x2	35x3	50x3	50x3	35x4 35x4
Distribution Pipe	-	-	-	-	-	-	-	MSDD-50TR2-E			MSDT-111R3-E			MSDF-1111R2-E

Type			Inverter Heat Pump			
Indoor Unit			SEZ-M35DA(L)I2	SEZ-M50DA(L)I2	SEZ-M60DA(L)I2	SEZ-M71DA(L)I2
Outdoor Unit			PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2
Refrigerant ^(*)			R32			
Power Supply			Outdoor power supply			
Cooling			230/Single/50			
Cooling	Source					
	Outdoor(V/Phase/Hz)					
	Capacity	Rated	kW	3.6	5.0	6.1
		Min-Max	kW	1.6 - 3.9	2.3 - 5.6	2.7 - 6.3
	Total Input	Rated	kW	0.857	1.315	1.525
	EER ^(*)			4.20	3.80	4.00
	Design load		kW	3.6	5.0	6.1
	Annual electricity consumption ^(*)		kWh/a	205	287	352
	SEER ^(*)			6.1	6.1	6.0
	SEER ^(*)			6.1	6.1	6.0
Heating	Energy efficiency class			A++	A++	A+
	Capacity	Rated	kW	4.1	6.0	7.0
		Min-Max	kW	1.6 - 5.0	2.5 - 7.2	2.8 - 8.0
	Total Input	Rated	kW	1.025	1.578	1.707
	COP ^(*)			4.00	3.80	4.10
	Design load		kW	2.4	3.8	4.4
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)
	Back up heating capacity		kW	0.0	0.0	0.0
Operating	Annual electricity consumption ^(*)		kWh/a	791	1279	1464
	SCOP ^(*)			4.2	4.1	4.2
	Energy efficiency class			A+	A+	A+
	Operating Current(Max)		A	13.7	13.8	19.9
	Input [cooling / Heating]	Rated	kW	0.047	0.077	0.084
	Operating Current(Max)		A	0.65	0.82	0.88
	Dimensions	H*W*D	mm	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700
	Weight		kg	22	22	25.5
	Air Volume (Lo-Mid-Hi)		m³/min	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18
	External Static Pressure ^(*)		Pa	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>
Outdoor	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23 - 27 - 31	30 - 34 - 37	30 - 34 - 38
		5Pa ^(*)	dB(A)	22 - 26 - 30	29 - 33 - 36	29 - 33 - 37
	Sound Level (PWL)		dB(A)	51	57	58
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)
	Weight		kg	46	46	67
	Air Volume	Cooling	m³/min	45	45	55
		Heating	m³/min	45	45	55
	Sound Level (SPL)	Cooling	dB(A)	44	44	47
		Heating	dB(A)	46	46	49
	Sound Level (PWL)	Cooling	dB(A)	65	65	67
Ext.Piping	Operating Current(Max)		A	13	13	19
	Breaker Size		A	16	16	25
	Diameter ^(*)	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88
	Max.Length	Out-In	m	50	50	55
	Max.Height	Out-In	m	30	30	30
	Guaranteed Operating Range (Outdoor)	Cooling ^(*)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 25Pa

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < >.


*8 SPL measured at ESP 5Pa.

SEZ-M SERIES



Indoor Unit

R32
R410A

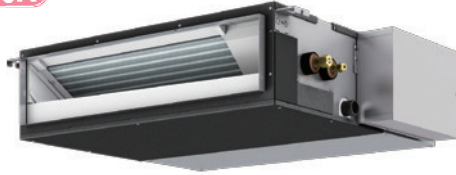

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

For Single

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

Remote Controller



Enclosed in
SEZ-M DAL2



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



Indoor Unit Combination		Outdoor Unit Capacity				
		For Single				
		25	35	50	60	71
S Seires		25x1	35x1	50x1	60x1	71x1
	Distribution Pipe	-	-	-	-	-

Type			Inverter Heat Pump					
Indoor Unit			SEZ-M25DA(L)2	SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2	
Outdoor Unit			SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	
Refrigerant ^(*)			R32					
Power Supply			Outdoor power supply 230/Single/50					
Cooling	Source Outdoor(V/Phase/Hz)							
	Capacity	Rated	kW	2.5	3.5	5.0	6.1	7.1
		Min-Max	kW	1.4 ~ 3.2	0.7 ~ 3.9	1.1 ~ 5.6	1.6 ~ 6.3	2.2 ~ 8.1
	Total Input	Rated	kW	0.714	1.000	1.547	1.848	2.151
	EER ^(*)			3.50	3.50	3.23	3.30	3.30
	Design load		kW	2.5	3.5	5.0	6.1	7.1
	Annual electricity consumption ⁽²⁾		kWh/a	146	202	290	385	451
SEER ^{(3)(*)}			6.0	6.0	6.0	5.5	5.5	
		Energy efficiency class	A+	A+	A+	A	A	
Heating	Capacity	Rated	kW	2.9	4.2	6.0	7.4	8.0
		Min-Max	kW	1.3 ~ 4.2	1.1 ~ 5.0	1.5 ~ 7.2	1.6 ~ 8.0	2.0 ~ 10.2
	Total Input	Rated	kW	0.803	1.076	1.617	2.049	2.285
	COP ^(*)			3.61	3.90	3.71	3.61	3.50
	Design load		kW	2.2	2.6	4.3	4.6	5.8
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)
	Back up heating capacity		kW	0.2	0.3	0.5	0.5	0.6
	Annual electricity consumption ⁽²⁾		kWh/a	769	878	1501	1516	2030
SCOP ^{(3)(*)}			4.0	4.1	4.0	4.2	3.9	
		Energy efficiency class	A+	A+	A+	A+	A	
Operating Current(Max)			A	7.4	9.2	14.3	15.7	15.8
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.043	0.047	0.077	0.084	0.102
	Operating Current(Max)		A	0.62	0.65	0.82	0.88	1.00
	Dimensions	H*W*D	mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700
	Weight		kg	18	22	22	25.5	25.5
	Air Volume (Lo-Mid-Hi)		m³/min	5.5 ~ 7 ~ 9	7 ~ 9 ~ 11	10 ~ 12.5 ~ 15	12 ~ 15 ~ 18	12 ~ 16 ~ 20
	External Static Pressure ^(*)		Pa	<5> ~ 25 ~ <35> ~ <50>	<5> ~ 25 ~ <35> ~ <50>	<5> ~ 25 ~ <35> ~ <50>	<5> ~ 25 ~ <35> ~ <50>	<5> ~ 25 ~ <35> ~ <50>
	Sound Level (Lo-Mid-Hi) (SPL)	Rated 5Pa ^(*)	dB(A)	23 ~ 26 ~ 30	23 ~ 27 ~ 31	30 ~ 34 ~ 37	30 ~ 34 ~ 38	30 ~ 35 ~ 40
			dB(A)	22 ~ 25 ~ 29	22 ~ 26 ~ 30	29 ~ 33 ~ 36	29 ~ 33 ~ 37	29 ~ 34 ~ 39
Sound Level (PWL)			dB(A)	50	51	57	58	60
Outdoor Unit	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	880-840-330	880-840-330
	Weight		kg	30	35	41	54	55
	Air Volume	Cooling	m³/min	36.3	34.3	45.8	50.1	50.1
		Heating	m³/min	34.6	32.7	43.7	50.1	50.1
	Sound Level (SPL)	Cooling	dB(A)	45	48	48	49	49
		Heating	dB(A)	46	48	49	51	51
	Sound Level (PWL)	Cooling	dB(A)	59	59	64	65	66
	Operating Current(Max)		A	6.8	8.5	13.5	14.8	14.8
	Breaker Size		A	10	10	20	20	20
Ext.Piping	Diameter ^(*)	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	20	20	30	30	30
	Max.Height	Out-In	m	12	12	30	30	30
Guaranteed Operating Range (Outdoor)			Cooling	°C	-10 ~ +46	-10 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 675. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The factory setting of ESP is shown without < >.

*7 SPL measured at ESP 5Pa.