

# Simple MA Remote Controller PAC-YT52CRA

## Backlit LCD


Features a liquid-crystal display (LCD) with backlight for operation in dark conditions.


## Flat Back

The slim and flat-back shape makes installation easier without requiring a hole in the wall. Thickness is 14.5mm or less.


## Vane Angle Setting


The vane button has been added to allow users to change the airflow direction (ceiling-cassette and wall-mounted units).

Pressing the  button will switch the vane direction.

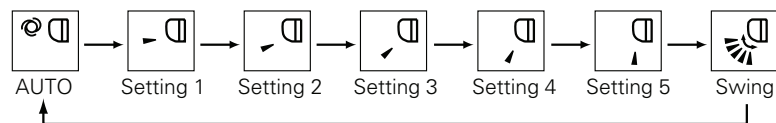

\* The settable vane directions vary depending on the indoor unit model to be connected.

\* If the unit has no vane function, the vane direction cannot be set. In this case, the vane icon flashes when the  button is pressed.

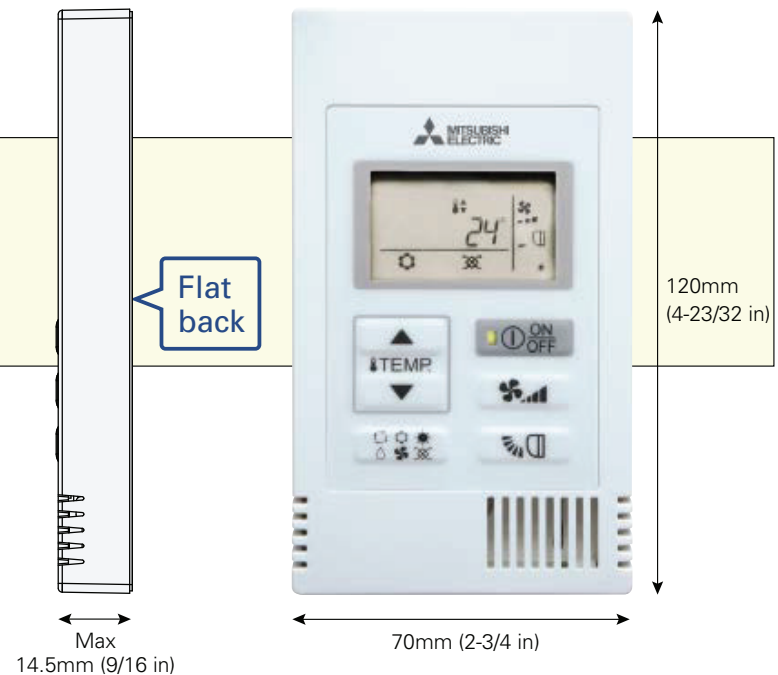


## Dual Set Point

### Two preset temperatures

When the operation mode is set to the Auto (Dual Set Point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, indoor unit will automatically operate in either the COOL or HEAT mode and keep the room temperature within the preset range.

Operation pattern during Auto (Dual Set Point) mode

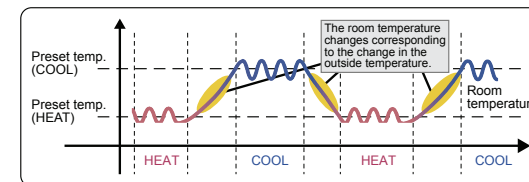

\*Please refer to the function list on pages 176-178 for the combination of the available units.